

New

DiagRA MCD Toolset

Measurement - Calibration - Diagnostics

Simple licence model, low entrance - top upgrading, fair prices



The features

- Top tools in an integrated package
- Support of CAN, K-Line and SMB
- Various platforms
- Mobile, easy to use
- Minimum hardware requirements
- Standards: CCP, MCD-2, ODX, CANdb, MDF, DCM

DiagRA M


- Powerful measurement
- Measurement data acquisition from ECUs and devices on CAN and SMB
- Online measurement and visualisation
- Offline processing of data

DiagRA C

- Mobile ECU calibration
- Graphical and tabular display of characteristic curves and fields
- Ergonomic characteristic field editor
- Editor for structured parameter adjustment of the fault path manager

DiagRA D

- ECU diagnostics on CAN and K-Line
- Workshop tester
- Scan-Tool
- Advanced developer functionalities
- Flash programming

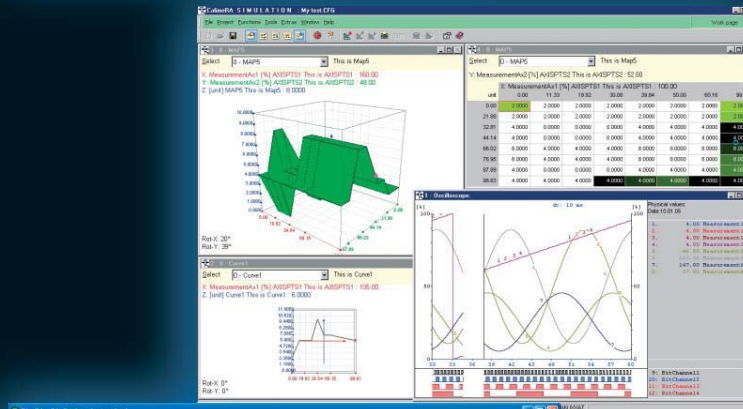

DTC	Description
1787 P1905	Throttle valve control (actuator) lower stop not reached
1788 P1906	Throttle valve control (actuator) upper stop not reached
1808 P1923	Throttle Pedal Position Sensor Switch C Circuit Low
1809 P1924	Throttle Pedal Position Sensor Switch C Circuit High
1810 P1925	Accelerator pedal position sensor 2 G185 signal low
1811 P1926	Accelerator pedal position sensor 2 G185 signal high
1812 P1927	Engine Coolant Temperature 1 Circuit High
1813 P1928	Engine Coolant Temperature 1 Circuit Low
1814 P1929	Engine Coolant Temperature 2 Circuit High
1815 P1930	Engine Coolant Temperature 2 Circuit Low
1816 P1931	Data bus-dimension message from ABS control module
1817 P1932	Data bus-dimension message from ABS control module
1818 P1933	Data bus-dimension message from ABS control module
1819 P1934	Data bus-dimension message from ABS control module
1820 P1935	Data bus-dimension message from ABS control module
1821 P1936	Data bus-dimension message from ABS control module
1822 P1937	Data bus-dimension message from ABS control module
1823 P1938	Data bus-dimension message from ABS control module
1824 P1939	Data bus-dimension message from ABS control module
1825 P1940	Data bus-dimension message from ABS control module
1826 P1941	Data bus-dimension message from ABS control module
1827 P1942	Data bus-dimension message from ABS control module
1828 P1943	Data bus-dimension message from ABS control module
1829 P1944	Data bus-dimension message from ABS control module
1830 P1945	Data bus-dimension message from ABS control module
1831 P1946	Data bus-dimension message from ABS control module
1832 P1947	Data bus-dimension message from ABS control module
1833 P1948	Data bus-dimension message from ABS control module
1834 P1949	Data bus-dimension message from ABS control module
1835 P1950	Data bus-dimension message from ABS control module
1836 P1951	Data bus-dimension message from ABS control module
1837 P1952	Data bus-dimension message from ABS control module
1838 P1953	Data bus-dimension message from ABS control module
1839 P1954	Data bus-dimension message from ABS control module
1840 P1955	Data bus-dimension message from ABS control module
1841 P1956	Data bus-dimension message from ABS control module
1842 P1957	Data bus-dimension message from ABS control module
1843 P1958	Data bus-dimension message from ABS control module
1844 P1959	Data bus-dimension message from ABS control module
1845 P1960	Data bus-dimension message from ABS control module
1846 P1961	Data bus-dimension message from ABS control module
1847 P1962	Data bus-dimension message from ABS control module
1848 P1963	Data bus-dimension message from ABS control module
1849 P1964	Data bus-dimension message from ABS control module
1850 P1965	Data bus-dimension message from ABS control module
1851 P1966	Data bus-dimension message from ABS control module
1852 P1967	Data bus-dimension message from ABS control module
1853 P1968	Data bus-dimension message from ABS control module
1854 P1969	Data bus-dimension message from ABS control module
1855 P1970	Data bus-dimension message from ABS control module
1856 P1971	Data bus-dimension message from ABS control module
1857 P1972	Data bus-dimension message from ABS control module
1858 P1973	Data bus-dimension message from ABS control module
1859 P1974	Data bus-dimension message from ABS control module
1860 P1975	Data bus-dimension message from ABS control module
1861 P1976	Data bus-dimension message from ABS control module
1862 P1977	Data bus-dimension message from ABS control module
1863 P1978	Data bus-dimension message from ABS control module
1864 P1979	Data bus-dimension message from ABS control module
1865 P1980	Data bus-dimension message from ABS control module
1866 P1981	Data bus-dimension message from ABS control module
1867 P1982	Data bus-dimension message from ABS control module
1868 P1983	Data bus-dimension message from ABS control module
1869 P1984	Data bus-dimension message from ABS control module
1870 P1985	Data bus-dimension message from ABS control module
1871 P1986	Data bus-dimension message from ABS control module
1872 P1987	Data bus-dimension message from ABS control module
1873 P1988	Data bus-dimension message from ABS control module
1874 P1989	Data bus-dimension message from ABS control module
1875 P1990	Data bus-dimension message from ABS control module
1876 P1991	Data bus-dimension message from ABS control module
1877 P1992	Data bus-dimension message from ABS control module
1878 P1993	Data bus-dimension message from ABS control module
1879 P1994	Data bus-dimension message from ABS control module
1880 P1995	Data bus-dimension message from ABS control module
1881 P1996	Data bus-dimension message from ABS control module
1882 P1997	Data bus-dimension message from ABS control module
1883 P1998	Data bus-dimension message from ABS control module
1884 P1999	Data bus-dimension message from ABS control module
1885 P2000	Data bus-dimension message from ABS control module
1886 P2001	Data bus-dimension message from ABS control module
1887 P2002	Data bus-dimension message from ABS control module
1888 P2003	Data bus-dimension message from ABS control module
1889 P2004	Data bus-dimension message from ABS control module
1890 P2005	Data bus-dimension message from ABS control module
1891 P2006	Data bus-dimension message from ABS control module
1892 P2007	Data bus-dimension message from ABS control module
1893 P2008	Data bus-dimension message from ABS control module
1894 P2009	Data bus-dimension message from ABS control module
1895 P2010	Data bus-dimension message from ABS control module
1896 P2011	Data bus-dimension message from ABS control module
1897 P2012	Data bus-dimension message from ABS control module
1898 P2013	Data bus-dimension message from ABS control module
1899 P2014	Data bus-dimension message from ABS control module
1900 P2015	Data bus-dimension message from ABS control module



RA Consulting GmbH
Zeiloch 6a • D-76646 Bruchsal
fon ++49 (0) 72 51/38 62-0
fax ++49 (0) 72 51/38 62-11
www.rac.de

DiagRA MCD Toolset

Measurement · Calibration · Diagnostics

The DiagRA MCD Toolset is an applications and diagnostics tool for working with electronic control units in the automotive industry. It is a combination of the already widespread tools: MescaRA, CalimeRA, Codes and DiagRA. The significant advantage for the user is in particular the common use of the device driver for the interface hardware, for protocols and parsers for the descriptive files in A2L or DBC format. Acquired data can be used across all tools. It is thus possible to graphically display series of measurements from diagnostic measured value blocks for comparison purposes in DiagRA M and to simultaneously calibrate it in the DiagRA C adjustment option. On-line operation can be started and terminated from all three parts of the toolset. Thereby, whenever it is technically possible, the same interface hardware is used. In spite of this, for example if there are several CAN buses, it is still possible to operate several interfaces. The settings necessary for this can be carried out centrally.

During this integration process it was particularly important to ensure that the individual toolset options could run separately. The more than 4000 users of our DiagRA diagnostic tool will be able to find this complete option again in the DiagRA D software. For the upgrade all that's required is a current software maintenance contract. Each of the current users can acquire the other options and add them to his tool, which is already on an operating system, by means of a simple upgrade, provided they are available on the same operating system.

DiagRA M (MescaRA)

Measuring options

With DiagRA M you can acquire and display on-line both graphically and numerically the state variables for a vehicle from control and measuring units. The acquisition is thereby carried out on the CAN and the serial measuring bus (SMB) – also simultaneously. For the definition of the values, that are to be acquired, the CAN DBC files or corresponding A2L files are needed. For the interpretation of the control unit descriptive files the parser is designed according to the ASAM MCD-2-MC specification.

Furthermore values of Scan-Tool Mode1 and measurement value blocks can be acquired by using the diagnostics option DiagRA D, this means to be displayed numerically and graphically and to be recorded.

DiagRA M offers a powerful, flexible, adaptable and storable user interface configuration and can be automated with convenient triggers with conditions which can be combined over several measurement channels. Acquired data can be saved and processed immediately via the integrated evaluation function. DiagRA M supports cold-start measurements and the transmission of CAN messages for specific unit testing.

Data exchange with other applications can take place via MDF Import and Export.

As in the other tools attention has been paid to a particularly simple, intuitive operation and hence a requirement-oriented functional scope has been achieved.

DiagRA C (CalimeRA)

Adjustment option

DiagRA C is a CCP (CAN Calibration Protocol) calibration tool whose functionality and operation is exactly tailor-made to the needs of the applications engineers and control unit developers. The user surface can be parameterized and the configurations can be stored. Hence repeatable and comparable sequences are possible.

Characteristic curves and fields can be displayed both graphically and numerically. The ergonomic characteristic field editor offers a Copy&Paste function and a histogram function in text mode.

With DiagRA C adjustments can be made on-line. The adjustment data can be printed out, compared and mixed. The exchange of adjustment data by DCM is supported.

Particularly worth mentioning is the option of doing without assimilation of the electronic control unit with an emulator for application tasks. CCP support can be achieved with simple and cheap CAN interfaces, so that a large part of the tasks of applications engineers can be achieved with little cost expenditure. In particular it is possible to set up a complex application environment in interaction with the other options in the DiagRA MCD Toolset.

The standard RA software Codes for the processing of control unit data have already been integrated into DiagRA C. The DiagRA C option thus offers a clearly-laid-out editor for the structured parameterizing of the error-path managers from different control unit manufacturers.

DiagRA D (DiagRA)

Diagnostics option

Already well-known on the market for several years, DiagRA D offers developers the three essential components of Scan-Tool, workshop tester and expanded functions. With the expanded functions, this simple-to-operate tool permits the developer to fully read out the error memories of control units via the descriptions from A2L files.

All 9 modes are supported in Scan-Tool-Mode according to ISO 9141-2, ISO 14230-4 and ISO 15765-4.

DiagRA D can also be used as a tester substitute.

DiagRA D supports various Keyword protocols on K-Line, CAN and ISO-CAN as well as GMLAN and Volvo D2 (on CAN) and is therefore suitable for different vehicle types. Diagnostic descriptions according to the ODX specification will be supported shortly.

Data can be triggered by hand using preconfigured measurements or acquired as a recording and further used. The data can also be saved in structured XML format. This structured storage option permits the uncomplicated reading into a database or other applications for data evaluation.

There are automation options via DDE and ASAP-3 interfaces for connecting to a test stand.

CAN messages can be acquired and transmitted. For this purpose the user only requires the DBC descriptive files.


A flash option for flash programming below KWP2000 (CAN TP2.0) is also available.

Based on a Open-Source(GPL)-DOS tool a Windows surface for doing the testings of the SAE J1699-3 OBDII Compliance Test Cases is implemented in DiagRA D.

Our software products are in use amongst others at the car manufacturers Audi, BMW, DaimlerChrysler, Ferrari, Fiat, Ford, Lamborghini, Opel, The Volkswagen Group and their suppliers.

Note: The use of the DiagRA MCD Toolset is only possible with special software licence keys that are available at RA Consulting. Several program parts like the workshop tester, the expanded functions and the flash programming option will be only delivered to user groups defined by RA Consulting.

Because the J1699-3 function is based on an Open-Source-Tool we cannot guarantee the permanent provision. We try for support and adaption as long as it is economically justifiable and technically reasonable.



RA CONSULTING

RA Consulting GmbH
Zeiloch 6a • D-76646 Bruchsal
Tel. +49 7251 38 62 - 0
Fax +49 7251 38 62 - 11
EMail info@rac.de
<http://www.rac.de>